



**DOOR LOCK SOLUTIONS
EXPERT**




CONTENTS

- 03 STAINLESS STEEL SERIES HOTEL LOCKS
- 05 ULTRA THIN PANEL HOTEL LOCKS
- 07 ZINC ALLOY SERIES HOTEL LOCKS
- 09 FINGERPRINT & PASSWORD DOOR LOCKS
- 15 HOTEL LOCK SYSTEM CONFIGURATION
- 16 ONLINE GUESTROOM STATUS IMAID SYSTEM
- 17 HOTEL ROOM SAFES
- 19 ABSORPTION COOLING HOTEL MINIBARS
- 21 DOOR SIGNAGES & TOUCH SWITCHES
- 23 HOTEL ROOM TELEPHONES
- 24 RFID CABINET LOCKER LOCK
- 25 LOCK SYSTEM ACCESSORIES
- 26 REFERENCE PROJECTS

Established in 2007, SURE SAFE LOCKS CO., LIMITED is a leading manufacturer of electronic door locks in Shenzhen, China. With more than 10 years' experience on producing and marketing in electronic security field, and working with a professional team of engineers and technicians, we have established a solid reputation for innovation and quality among customers and end users in and out of China. We insist that good quality is very important for the company, we are strict in processing of material choosing, designing, testing, and manufacturing, according to the principle of ISO9001.

Our main products are Hotel Door Locks & System, Electronic Residential Door Locks, Electronic Cabinet Locks, Hotel Guest Room Products, like safe, minibar, room number signage system...etc. They are widely used for more than 500 customers worldwide, like hotels, offices, apartments, residential districts, schools, hospitals, sauna bath centers, SPA, swimming pools, gym ... etc. They have already been sold to Southeast Asia, Middle East, Eastern Europe, South America and Western Africa...etc. We have obtained the certifications, like CE, FCC, ISO... etc.

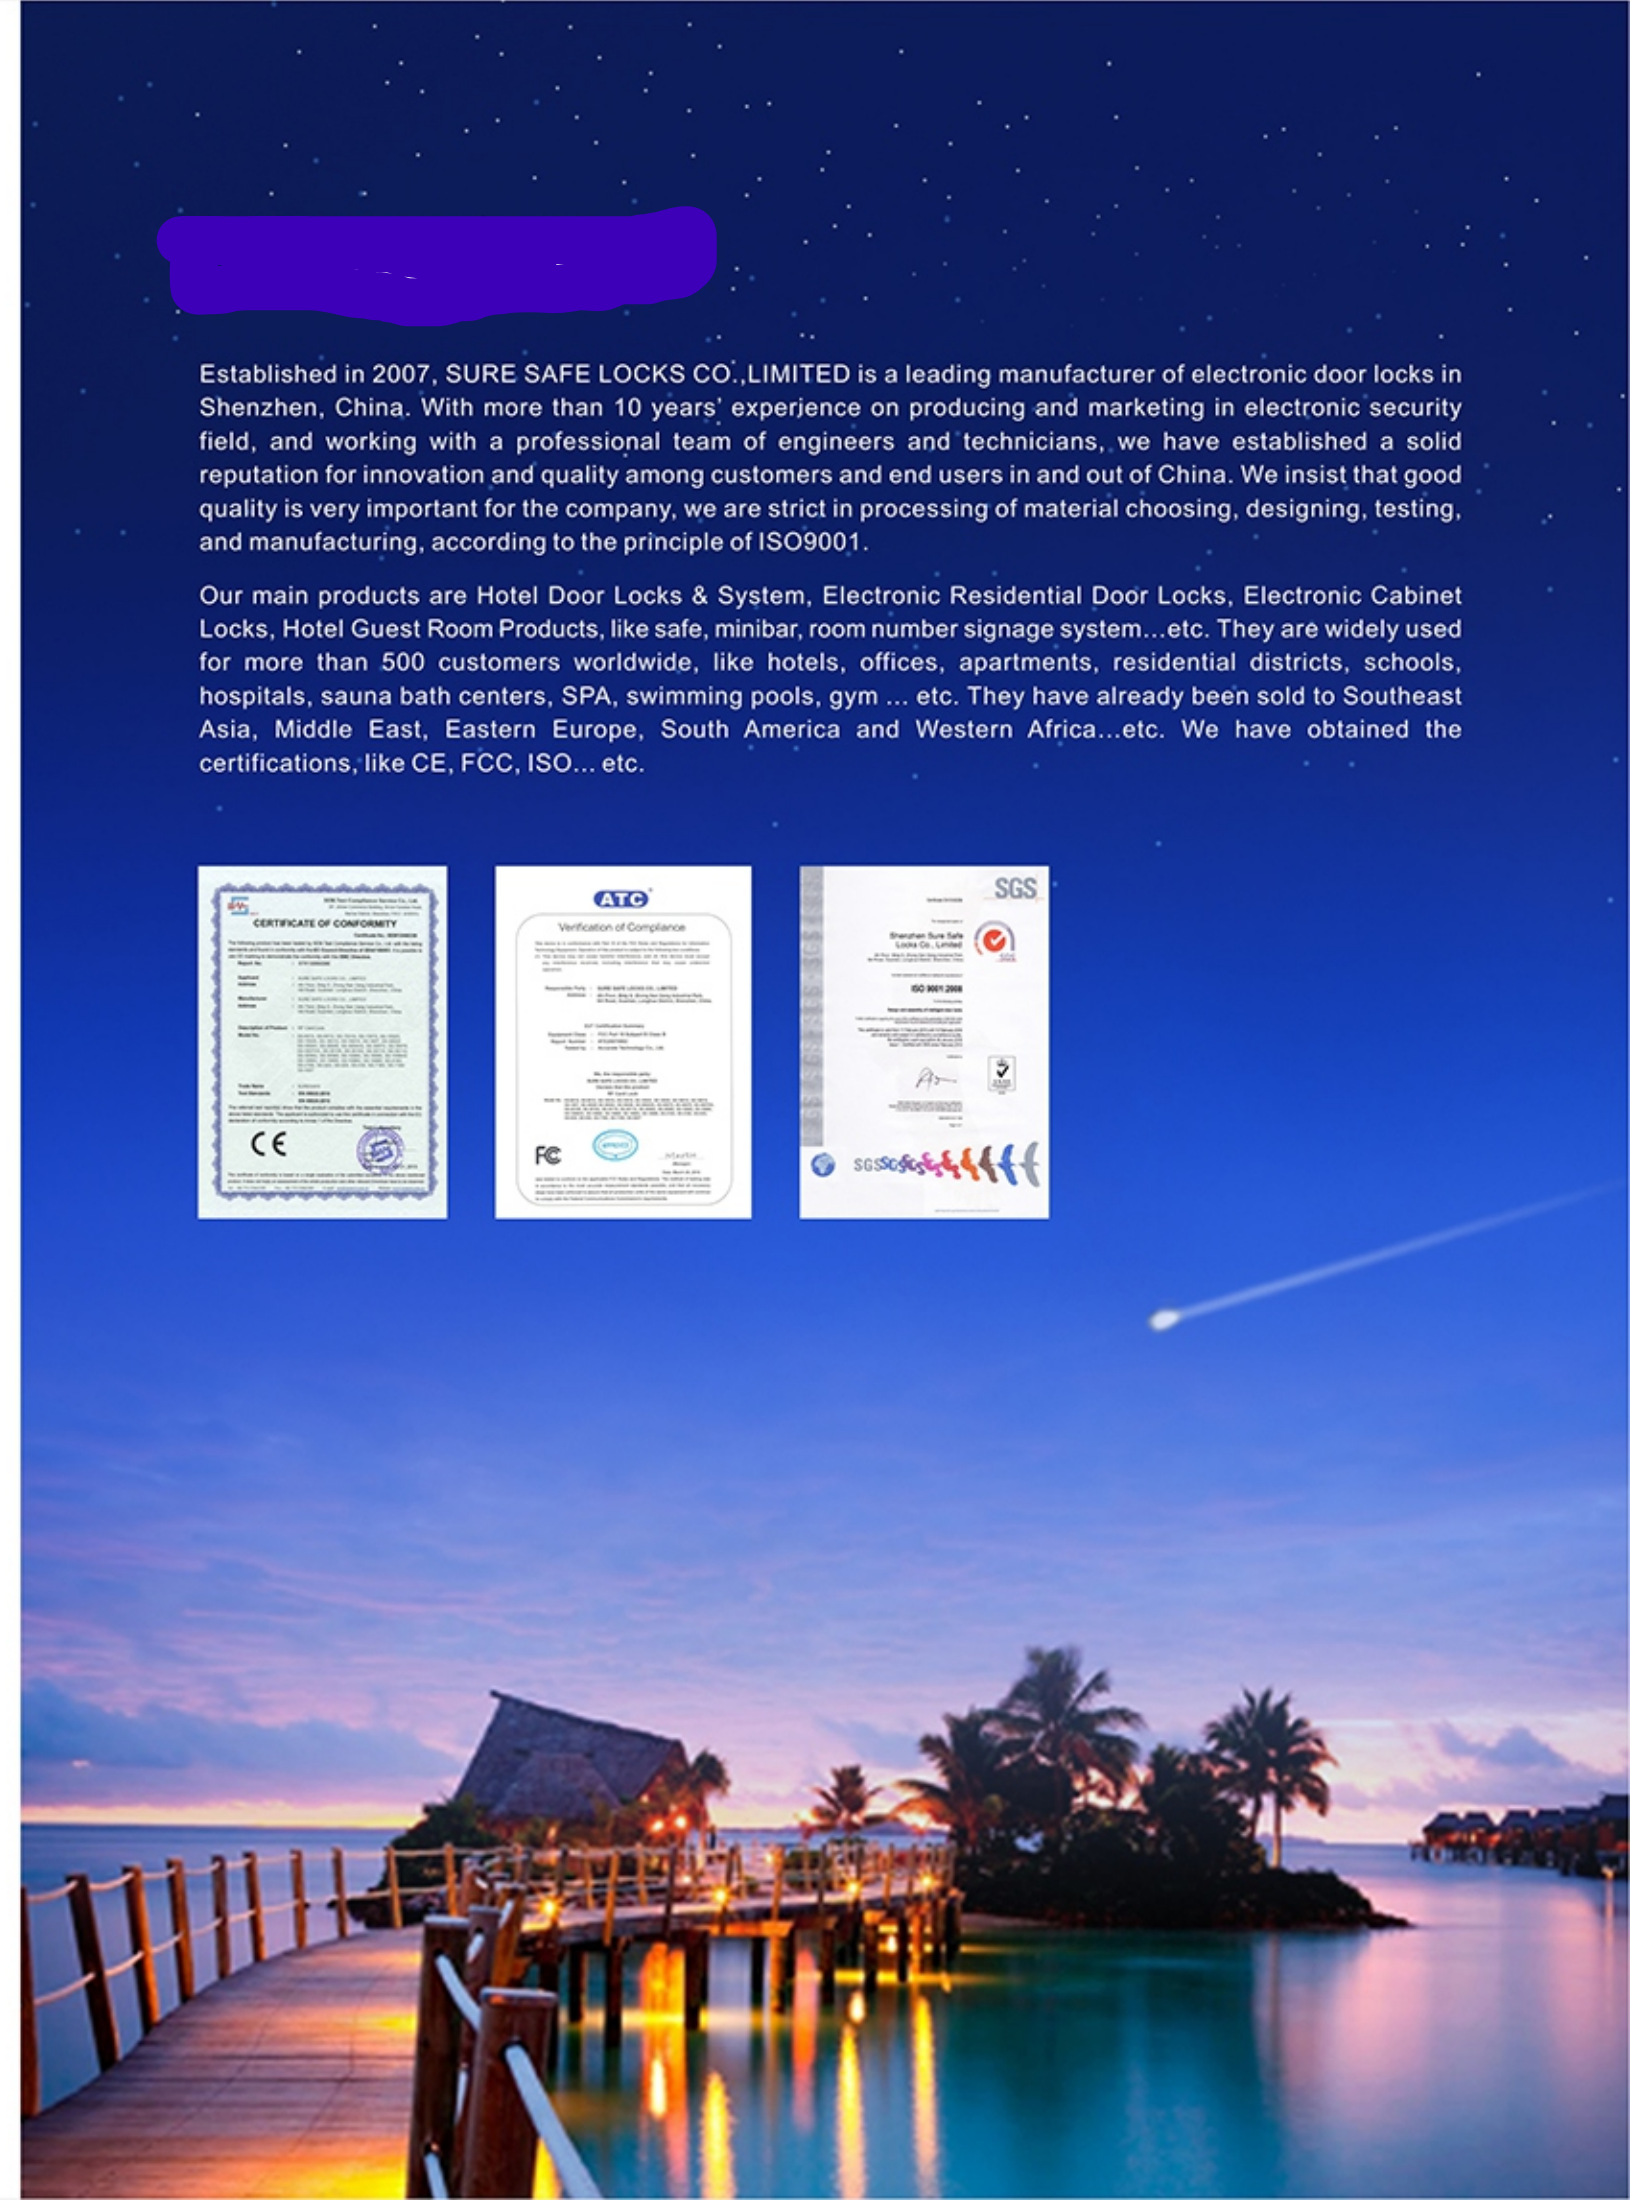

STAINLESS STEEL SERIES HOTEL LOCKS



**REAL STAINLESS STEEL
PANELS AND HANDLES,
SOME MODELS CAN BE
SUPPLIED WITH RUBBER GASKETS
FOR EXTERNAL DOOR USE
FOR SEASIDE HOTELS !**

SS-261G



SS-100G



SS-100S



SS-302G



SS-302S



SS-601G



SS-601S



SS-620G



SS-620S



SS-3002G



SS-3002S



SS-3004G



SS-3004S

Superior Benifits :

- self-error detective, very durable and attractive.
- Warranty is 2 years
- Can work with new developed wireless online iMaid System to enable hotels to have real time rooms' status, To check if guest is in room or out and how much time he stays, To get fast response from guests if DND and CLEAN is requested.
- Can realize " One Card System ", Wall Reader and Elevator Controller are available to be integrated with hotel elevator, parking barrier system, common doors, swimming pool doors, restaurant doors, POS...etc.
- CE, FCC certified
- Adopt Japan MABUCHI micro-motors which ensure 500,000 running times without problems.
- RFID Mifare PHILIPS technology, 100,000 times write life for keycard, contactless reading keycard.
- ANSI / US Standard mortises
- Free-rotating while locked
- Powered by 4 units of AA batteries, easy replacement.
- Openings 20,000 times for one new battery pack.
- Mifare card and RF card versions are available.
- Lower power alarm voltage : 4.8V (still able to open about 100 times)
- Meeting passage mode is actived by passage card for meeting case.
- 3 public passage modes : Hotel Passage, Building Passage and Floor Passage.
- Do not disturb (D.N.D)function is available : while dead bolt is on from inside, the lock will refuse keycard from outside by red light blinking.
- Panic release function : the deadbolt and latch are automatically retracted by inside handle pressing to easy egress when emergency happens.
- For 35-75mm thickness doors.

Card Usage :

- Guest Card : Issued from reception to open its own room with expiration date.
- Master Card : Hold by management or GM or Manager to access all rooms of hotel (even locked by deadbolt).
- Floor Card : Hold by clean staff to enter the rooms in one floor.
- Building Card : Hold by Manager to enter the rooms in one building.
- Lost Card : To suspend the lost guest cards.
- Emergency Card : Enter all rooms when emergency happens, and the rooms will stay open.
- Group Card : Can open all rooms you selected in one Group. random rooms.

Technical Features :

- Power : 6V / 4 x AA batteries
- Card : RF (125KHz) and Mifare (13.56MHz) Cards are available.
- Inductive Distance : 2-5 CM
- Working Temperature : -30°C ~ 60°C
- Working Humidity : 15~85% RH
- Static current : < 10uA
- Working current : < 150mA
- Unlock record : The latest 350 records is available
- Gross Weight : 2.9 KGS
- Package : 6 Locks / box , 61.5x36.5x32 CBM / carton.
- Open mode : Card and Mechanical keys.



SS-1601S

ULTRA THIN PANEL SERIES HOTEL LOCKS

ULTRA THIN PANEL **10 MM**,
WITH POPULAR ACRYLIC SURFACE,
VERY LUXURY AND ELEGENT !



SS-282B



SS-282RG



SS-282S



SS-285G



SS-285QG



SS-285B



SS-285HG



SS-285S



SS-2020B



SS-2020HG



SS-2020S

Superior Benifits :

- Zinc alloy material for panels and handles, self-error detective, very durable and attractive.
- Warranty is 2 years
- Can work with new developed wireless online iMaid System to enable hotels to have real time rooms' status, To check if guest is in room or out and how much time he stays, To get fast response from guests if DND and CLEAN is requested.
- Can realize " One Card System ", Wall Reader and Elevator Controller are available to be integrated with hotel elevator, parking barrier system, common doors, swimming pool doors, restaurant doors, POS...etc.
- CE, FCC certified
- Adopt Japan MABUCHI micro-motors which ensure 500,000 running times without problems.
- RFID Mifare PHILIPS technology, 100,000 times write life for keycard, contactless reading keycard.
- ANSI / US Standard mortises
- Free-rotating while locked
- Powered by 4 units of AA batteries, easy replacement.
- Openings 20,000 times for one new battery pack.
- Mifare card and RF card versions are available.
- Lower power alarm voltage : 4.8V (still able to open about 100 times)
- Meeting passage mode is activated by passage card for meeting case.
- 3 public passage modes : Hotel Passage, Building Passage and Floor Passage.
- Do not disturb (D.N.D)function is available : while dead bolt is on from inside, the lock will refuse keycard from outside by red light blinking.
- Panic release function : the deadbolt and latch are automatically retracted by inside handle pressing to easy egress when emergency happens.
- For 35-75mm thickness doors.

Card Usage :

- Guest Card : Issued from reception to open its own room with expiration date.
- Master Card : Hold by management or GM or Manager to access all rooms of hotel(even locked by deadbolt).
- Floor Card : Hold by clean staff to enter the rooms in one floor.
- Building Card : Hold by Manager to enter the rooms in one building.
- Lost Card : To suspend the lost guest cards.
- Emergency Card : Enter all rooms when emergency happens, and the rooms will stay open.
- Group Card : Can open all rooms you selected in one Group. random rooms.

Technical Features :

- Power : 6V / 4 x AA batteries
- Card : RF (125KHz) and Mifare (13.56MHz) Cards are available.
- Inductive Distance : 2-5 CM
- Working Temperature : -30°C ~ 60°C
- Working Humidity : 15~85% RH
- Static current : < 10uA
- Working current : < 150mA
- Unlock record : The latest 350 records is available
- Gross Weight : 3 KGS
- Package : 6 Locks / box , 61.5x36.5x32 CBM / carton.
- Open mode : Card and Mechanical keys.



SS-2020S

ZINC ALLOY SERIES HOTEL LOCKS

ADVANCED LCD SCREEN
TO PROVIDE ROOM NUMBER, DATE & TIME,
BATTERY STATUS AND WELCOME INFO !



SS-1501S



SS-02G



SS-02S



SS-218G



SS-218S



SS-280G



SS-280S



SS-1008G



SS-1008S



SS-1068G



SS-1068S

Superior Benifits :

- Zinc alloy material for panels and handles, self-error detective, very durable and attractive.
- Warranty is 2 years
- Can work with new developed wireless online iMaid System to enable hotels to have real time rooms' status, To check if guest is in room or out and how much time he stays, To get fast response from guests if DND and CLEAN is requested.
- Can realize "One Card System", Wall Reader is available to be integrated with hotel elevator, parking barrier system, common doors, swimming pool doors, restaurant doors, POS...etc.
- CE, FCC certified
- Adopt Japan MABUCHI micro-motors which ensure 500,000 running times without problems.
- RFID Mifare PHILIPS technology, 100,000 times write life for keycard, contactless reading keycard.
- ANSI mortise
- Free-rotating while locked
- Powered by 4 units of AA batteries, easy replacement.
- Openings 20,000 times for one new battery pack.
- Mifare card and RF card versions are available.
- Lower power alarm voltage : 4.8V (still able to open about 100 times)
- Meeting passage mode is actived by passage card for meeting case.
- 3 public passage modes : Hotel Passage, Building Passage and Floor Passage.
- Do not disturb (D.N.D)function is available : while thumb turn is on from inside, the lock will refuse keycard from outside by red light blinking.
- Panic release function : the deadbolt and latch are automatically retracted by inside handle pressing to easy egress when emergency happens.
- For 35-75mm thickness doors

Card Usage :

- Guest Card : Issued from reception to open its own room with expiration date.
- Master Card : Hold by management or GM or Manager to access all rooms of hotel(even locked by deadbolt).
- Floor Card : Hold by clean staff to enter the rooms in one floor.
- Building Card : Hold by Manager to enter the rooms in one building.
- Lost Card : To suspend the lost guest cards.
- Emergency Card : Enter all rooms when emergency happens, and the rooms will stay open.
- Group Card : Can open all rooms you selected in one Group. random rooms.

Technical Features :

- Power : 6V / 4 x AA batteries
- Card : RF (125KHz) and Mifare (13.56MHz) Cards are available.
- Inductive Distance : 2-5 CM
- Working Temperature : -30°C ~ 60°C
- Working Humidity : 15~85% RH
- Static current : < 10uA
- Working current : < 150mA
- Unlock record : The latest 350 records is available
- Gross Weight : 3 KGS
- Package : 6 Locks / box , 61.5x36.5x32 CBM / carton.
- Open mode : Card and Mechanical keys.



SS-3008S



SS-3011G



SS-3011S



SS-1501S

FINGERPRINT & PASSWORD DOOR LOCKS



**WORK WITH ORDINARY SINGLE LATCH,
CAN UPGRADE YOUR TRADITIONAL DOOR
LOCK TO ELECTRONIC PASSWORD
DOOR LOCK EASILY !**



SS-818PW-G



SS-818PW-QG



SS-818PW-S

Superior Benifits :

- The sensing card is under hierarchic management
- Supports 2 administration cards and 200 door opening cards
- Emergency door opening with mechanical key
- Password entering with touch keys
- The password can be changed, and 1 administration password and 50 door opening passwords can be set
- The password can contain messy codes, and the maximum number of digits is 12
- With 4.8V low voltage alarm, the lock can still be unlocked for 100 times.
- For 35-75mm thickness doors
- CE, FCC Certified

Technical Features :

- Power : 6V / 4 x AA batteries
- Card : RFID (125KHz)
- Inductive Distance : 2-5 CM
- Working Temperature : -30°C ~ 60°C
- Working Humidity : 15~85% RH
- Static current : < 15uA
- Working current : <200mA
- Mortise: Single Latch 60/70mm
- Gross Weight : 2.5 KGS
- Package : 6 Locks / box , 61.5x36.5x32 CBM / carton.
- Open mode : Password, Card and Mechanical keys.



SS-818PW-G



**THE MOST RELIABLE INTELLIGENT
DOOR LOCK FOR APARTMENT,
OFFICE AND RESIDENCE DOORS !**



SS-6800TG



SS-6800TR



SS-6800TS

Superior Benifits :

- Stainless steel 304 for panels, handles and mortise, with popular acrylic surface on panels.
- The sensing card is under hierarchic management
- Operated by fingerprint + password + card + key + remote control (optional)
- 9 Managers (No.1-9), 291 Users (No. 10-300, including fingerprint + password + card + remote controller)
- Semiconductor acquisition fingerprint(Swedish FPC)
- Humanization LED screen
- Emergency door opening with mechanical key
- Password entering with touch keys
- The password can contain messy codes, and the maximum number of digits is 20
- Users can be deleted individually or delete all in one time.
- Passage mode is available.
- English voice guide is available.
- Dead bolt can be engaged by lifting handle
- With 4.8V low voltage alarm, the lock can still be unlocked for 200 times.
- For 40-120mm thickness doors
- CE, FCC Certified

Technical Features :

- Size : 359 x 79 x 33 mm
- Power : 6V / 4 x AA batteries
- Card : Mifare (13.56MHz) Card
- Inductive Distance : 2-5 CM
- Working Temperature : -30°C ~ 60°C
- Working Humidity : 15~85% RH
- Static current : <20uA
- Working current : <200mA
- Error rate : < 0.0001%
- Refusal rate: < 0.02%
- Verification time: <300 Millisecond
- Unlock record : 256pcs or more
- Mortise: national standard mortise
- Gross Weight : 6 KGS
- Package : 4 Locks / box , 52x44x35 CBM / carton.
- Open mode : Fingerprint, Password, Card, Mechanical keys and Remote controller (Optional).



SS-6800TG



**WORK WITH EUROPEAN STANDARD
3585, 4585 AND 6085 ANTI-PANIC
MORTISE, CAN UPGRADE YOUR
TRADITIONAL DOOR LOCK TO
ELECTRONIC FINGERPRINT &
PASSWORD DOOR LOCK EASILY !**



SS-5800G



SS-5800RG



SS-5800S

Superior Benifits :

- The sensing card is under hierarchic management
- Supports 100pcs password users and 150pcs fingerprint users.
- " Password + Key " and " Fingerprint + Password + Key " lock models are available.
- Semiconductor acquisition fingerprint(Swedish FPC)
- Emergency door opening with mechanical key
- Password entering with touch keys
- The password can contain messy codes, and the maximum number of digits is 20
- Users can be deleted individually or delete all in one time.
- Passage mode is available.
- English voice guide is available.
- Dead bolt can be engaged by lifting handle
- With 4.8V low voltage alarm, the lock can still be unlocked for 200 times.
- For apartment, office and residence doors with thickness 35-75mm.
- CE, FCC Certified


Technical Features :

- Size : 300 x 50 x 22 mm
- Power : 6V / 4 x AAA batteries
- Card : Mifare (13.56MHz) Card
- Inductive Distance : 2-5 CM
- Working Temperature : -30°C ~ 60°C
- Working Humidity : 15~85% RH
- Static current : < 15uA
- Working current : <200mA
- Error rate : < 0.0001%
- Refusal rate: < 0.02%
- Verification time: <300 Millisecond
- Mortise: EU 3585, 4585 and 6085 anti-panic mortises
- Gross Weight : 2.8 KGS
- Package : 6 Locks / box , 61.5x36.5x32 CBM / carton.
- Open mode : Fingerprint, Password and Mechanical keys.



SS-5800S


HOTEL LOCK SYSTEM CONFIGURATION

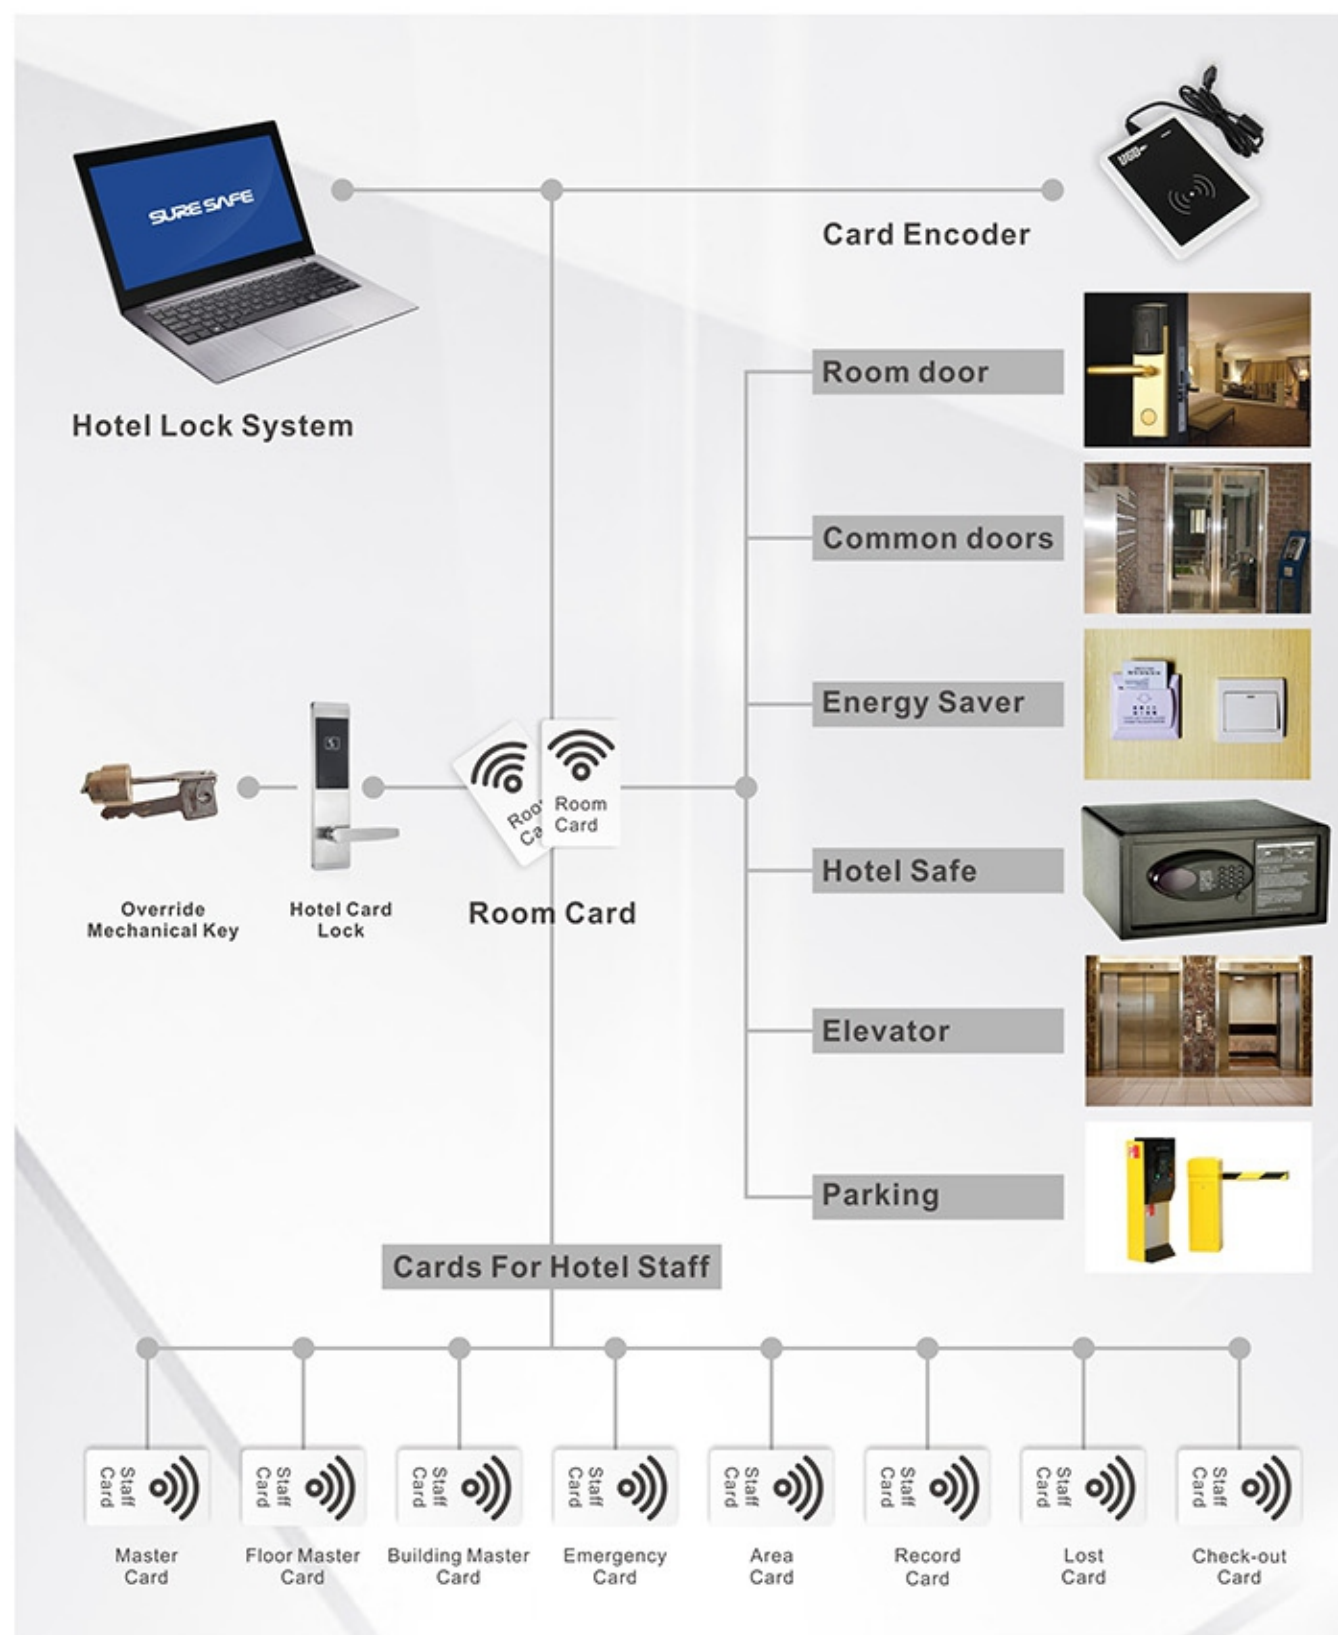

ONLINE GUESTROOM STATUS IMAID SYSTEM

Complete iMaid system including 4 parts:

Out-room panel, In-room panel, AP router and iMaid system(PC software and mobile APP)

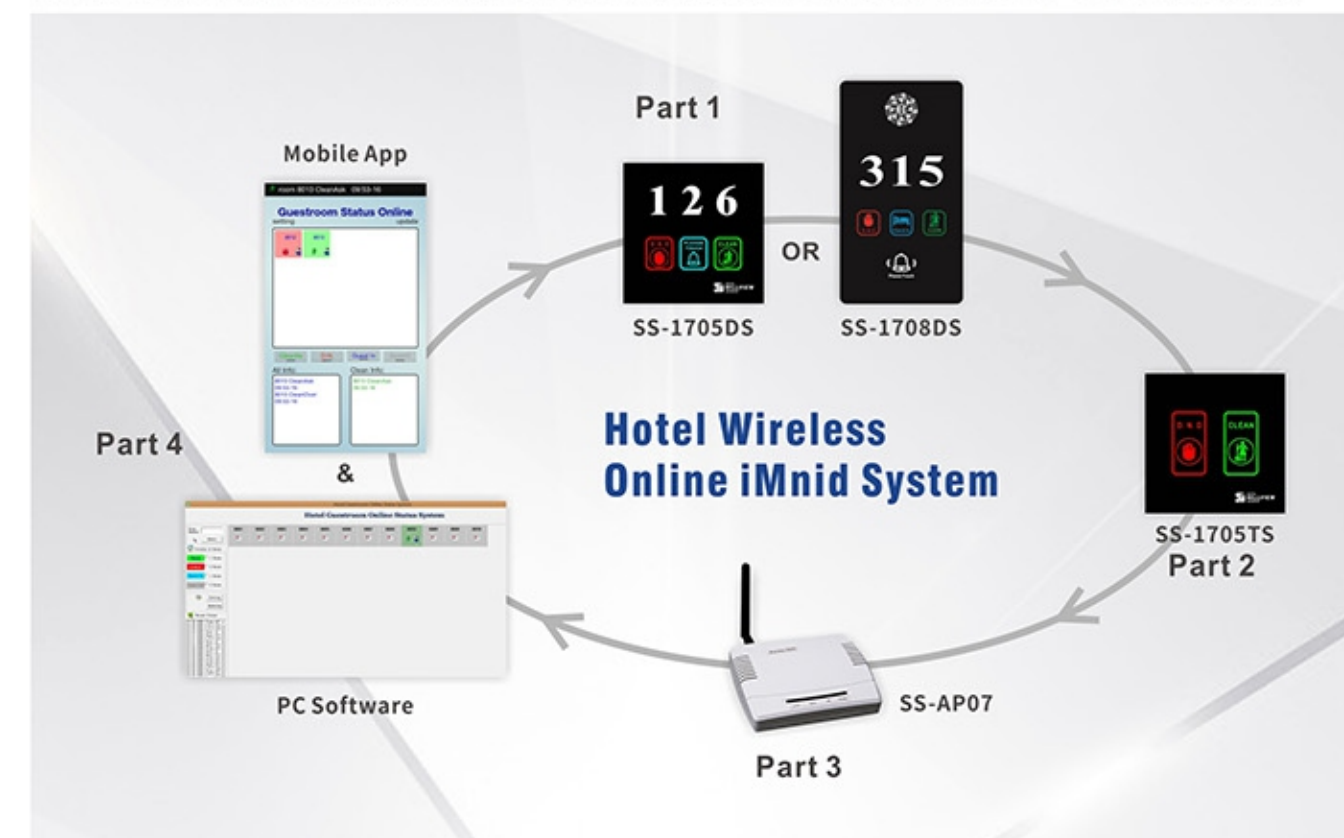

Technical Features :

1. Functions: Wireless, Hidden guest-in, Room no., Don't Disturb, Make up room, Bell, Room Status Online-Checking.
2. Main Valuable Functions and Features for our wireless online iMaid system:
 - No wires between out-room panel and in-room panel. There is no wiring required between outdoor panel and indoor panel, hotel doesn't need to open new holes for wiring from inside to outside, save labor cost and time, it makes things easier.
 - To get fast response from guest if DND or CLEAN is requested by wireless online from reception desk or mobile APP Housekeeper or maid doesn't need to go to each room to check DND, CLEAN requests, he or she can get requests from reception desk or by phone via APP.
 - To check if guest is in room or out and how much time he stays. Housekeeper or management can see room status easily on software or by mobile.
 - To refresh guests' mind and give good image of hotels. This system makes guests more comfortable and feel at home to enjoy easier life which intelligent technology brings.
 - To check real room status online at any time, anywhere. Management will be more rigorous and smooth, accounting will be easier under control.
 - Less wirings needed, very good option for old hotels: To Save Wirings and Make Things Easier.
 - Both inbuilt electronic doorbell and extraly wired real doorbell can be used optionally: To Give More Options for Doorbell.

HOTEL ROOM SAFES

SS-2043-1



Technical Features :

- Shape Size: 200H*420W*370D mm
- Packing Size: 260H*460W*410D mm
- Open Mode: password + override mechanical keys
- 4-6 digits personal code and 6 digits master codes
- Thickness: door-5mm; wall-2mm
- G. Weight: 11 kgs
- 4 AA batteries
- LED Display
- Available Colors : Ivory and Black
- Optional Functions : query function, inside lighting, inside socket
- Can contain all popular size laptops.
- CE, FCC Certified

Technical Features :

- Brand New Touch Panel Hotel Room Safe
- Shape Size: 200H*420W*370D mm
- Packing Size: 260H*460W*410D mm
- Open Mode: password + override mechanical keys
- 4-6 digits personal code and 6 digits master codes
- Thickness: door-5mm; wall-2mm
- G. Weight: 11 kgs
- 4 AA batteries
- LED Display, Backlight buttons and inside lighting
- Available Colors : Ivory and Black
- Optional Functions : query function, inside lighting, inside socket
- Can contain all popular size laptops.
- CE, FCC Certified

SS-2043T



SS-2043-2



Technical Features :

- Shape Size: 200H*420W*370D mm
- Packing Size: 260H*460W*410D mm
- Open Mode: password + override mechanical keys
- 4-6 digits personal code and 6 digits master codes
- Thickness: door-5mm; wall-2mm
- G. Weight: 11 kgs
- 4 AA batteries
- LED Display
- Available Colors : Ivory and Black
- Optional Functions : query function, inside lighting, inside socket
- Can contain all popular size laptops.
- CE, FCC Certified

Technical Features :

- Top-open Safe
- Shape Size: 170H*410W*350D mm
- Packing Size: 230H*450W*390D mm
- Open Mode: password + override mechanical keys
- 4-6 digits personal code and 6 digits master codes
- Thickness: door-5mm; wall-2mm
- G. Weight: 10 kgs
- 4 AA batteries
- LED Display
- Available Colors : Ivory and Black
- Optional Functions : query function, inside lighting, inside socket
- Can contain 14 Inch or smaller laptops, Ipad..etc
- CE, FCC Certified

SS-1540TP



SS-2043-3



Technical Features :

- Shape Size: 200H*420W*370D mm
- Packing Size: 260H*460W*410D mm
- Open Mode: password + override mechanical keys
- 4-6 digits personal code and 6 digits master codes
- Thickness: door-5mm; wall-2mm
- G. Weight: 11 kgs
- 4 AA batteries
- LED Display, Backlight buttons and inside lighting
- Available Colors : Ivory and Black
- Optional Functions : query function, inside lighting, inside socket
- Can contain all popular size laptops.
- CE, FCC Certified



ABSORPTION COOLING HOTEL MINIBARS

OUTSTANDING FEATURES :
HIGH PERFORMANCE WITH SUPERIOR
ABSORPTION NEW TECHNOLOGY,
COOLING BY AMMONIA, NO MOVING
PART, NO VIBRATION, 100% NOISELESS,
MAINTENANCE-FREE OPERATION !



SS-30B



| Model | SS-30B | SS-30G | SS-40B | SS-40G |
|------------------------------|-------------|-------------|-------------|-------------|
| Cooling Method : | Absorption | Absorption | Absorption | Absorption |
| Storage Temperature(°C) | 0~8 | 4~12 | 0~8 | 4~12 |
| Input Power(W): | 65 | 65 | 65 | 65 |
| Energy Consumption(kwh/24h): | 0.8 | 0.9 | 0.8 | 0.9 |
| Validity Capacity(L): | 30 | 30 | 40 | 40 |
| Voltage(V): | AC220 | AC220 | AC220 | AC220 |
| Type of Controller: | Digital | Digital | Digital | Digital |
| Type of Door Seal: | Removable | Removable | Removable | Removable |
| Net/Gross Weight(kg): | 14.4/16.5 | 16.1/18.2 | 16.5/18.6 | 18.2/20.3 |
| Shape Size(W*D*H)mm: | 400*420*480 | 400*415*480 | 400*440*550 | 400*435*550 |
| Packing Size(W*D*H)mm: | 460*480*545 | 460*480*545 | 460*500*610 | 460*500*610 |

DOOR SIGNAGES & TOUCH SWITCHES

Big Door Signage




Technical Features :

- Hotel Room Number Panel & Switch
- Wired and Wireless Version (By Bluetooth 2.4G) are available
- Metal frame, Rose gold and Silver colors are available.
- Panel Material : Acrylic / tempered glass
- Outside Panel Size : 258 x 136 x 38 mm
- Inside Switch Size : 88 x 86 x 38 mm
- Voltage : AC110V-240V self adapting, DC12V available
- Backlight Touch Design
- With Room No., Do Not Disturb, Check In, Make Up Room and Bell
- With printed room number, need to offer us all room numbers first .
- 38 different music shift by long pressing on inside switch.
- Can print hotel logo on both outside panel and inside switch.
- CE & FCC Certified

Technical Features :

- Hotel Room Lighting Switch & Lighting Switch Complex Panel.
- Metal frame, Rose gold and Silver colors are available.
- Panel Material : Acrylic / tempered glass
- TLS-41G Size : 88 x 86 x 38 mm
- CLX-81PS Size : 264 x 86 x 38 mm
- Single switch can contain 1,2,3,4 keys.
- Complex panel can contain 2,3 and 4 single switches (Including lighting switch and Socket)
- Voltage : AC110V-240V self adapting, DC12V available
- Backlight Touch Design
- Keys' name and shape can be customized.
- Hotel logo can be printed on it.
- Long life spam, 1 million times touch.
- CE & FCC Certified

Lighting Switch

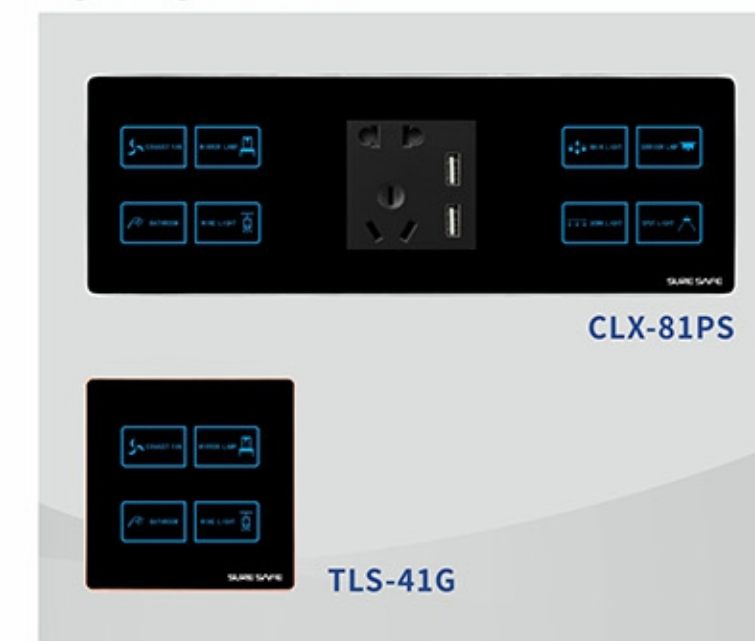

Small Door Signage



Technical Features :

- Small Hotel Room Number Panel & Switch
- Panel Material : Acrylic / tempered glass
- Size : 88 x 86 x 38 mm
- Voltage : AC220V or DC12V
- Backlight touch design
- With Room No., Waiting, Do Not Disturb, Bell and Clean
- With electronic room number, can be set/adjusted by hotel itself.
- Can print hotel logo on both inside&outside switches.
- CE & FCC Certified


Technical Features :

- Working Voltage: AC220V 50/60Hz
- Setting Temperature: 5°C-30°C
- Wiring Requirements: Wire 0.75mm²-1.5mm²
- Output Power: 180 W
- Temperature Control Accuracy: ±1°C
- Size: 88 x 86 x 38mm
- White & Black Colors Are Available
- CE & FCC Certified

Thermostat Switch



HOTEL ROOM TELEPHONES

| | | | |
|---|---|---|---|
| SS-0001B | SS-0001W | SS-0003B | SS-0003W |
|  |  |  |  |
| SS-0005B | SS-0005W | SS-0009B | SS-0009LB |
|  |  |  |  |
| SS-0009LW | SS-0009W | SS-0010B | SS-0010W |
|  |  |  |  |
| SS-0011B | SS-0011W | SS-0012B | SS-0012W |
|  |  |  |  |

Technical Features :

- Professionally designed panel with hotel name and logo printed available
- Compatible with the PBX of NEC, SIEMENS, PHILIPHS, Alcatel, Huawei and others mainstream switches
- One-touch button(+10, +5, +3, +0)
- Flash time adjustable to fit for different exchange and three way talk, standard flash time is 600ms
- 14 digits memory
- Dual tones electronic ringing and volume 2 levels adjustable
- Hand-free call volume multilevel adjustable
- Large message light, voice message extraction
- Automatic take-up function
- Music on hold
- Flash / Transfer
- Auto re-dial
- Desk and wall mountable
- Data socket
- Thunder-proof and Anti-EMI design
- Waterproof and moisture proof
- CE & FCC Certified

RFID CABINET LOCKER LOCK

| | | | |
|---|--|---|--|
| SS-110G | SS-110S | SS-115G | SS-115S |
|  |  |  |  |
| SS-116HG | SS-116S | SS-118G | SS-118S |
|  |  |  |  |
| SS-118PWG | SS-118PWS | SS-125G | SS-125S |
|  |  |  |  |
| Bracelet Card | | Lock Case | |
|  | |  | |

Technical Features :

- Single Card and Double Cards open mode are available
- Power: 4 AA Batteries / 6 V
- Warning When Power Lower Than 4.8V
- More than 12 months'battery life
- External power supply is available
- Locker lock will open automatically when use the RFID card, handle will not be required
- Manual Open is available When Emergency
- Gears portfolio campaign to secure safe operation
- With bracelet card, easy carrying and waterproof
- Working with EM4100 RFID card or wristband, bracelet cards
- Working Temperature: -30°C to 80°C
- CE & FCC Certified

LOCK SYSTEM ACCESSORIES

Technical Features :

Card Reader Features :

- Working voltage is 12V
- To control electromagnetic locks, car parking barrier system...etc, the devices need to read our card
- Can do floor control, building control and system control
- CE, FCC Certified

Elevator Controller Features :

- Includes reader + controller board + power supply/5V
- Working mode 1 : floor control, valid guest cards can only go to their own floors
- Working mode 2 : elevator control, valid guest cards can go any floors
- Each controller board can control max 8 floors
- Can add in max 8 boards to control total 64 floors
- Supplied with wiring diagram
- CE, FCC Certified

Elevator Controller & Wall Reader

CR-01
Card Reader



LFC-01
Elevator Controller




| | | | |
|-----------------|-------------|------------------------------|------------------------------|
| 3585 | 4585 | M01 | M02 |
| | | | |
| M03 | M04 | DT-01 Data Receiver | ECD-01 Card Encoder |
| | | | |
| Mifare Lock PCB | RF Lock PCB | RFES-01 Energy Saving Switch | RFES-02 Energy Saving Switch |
| | | | |


REFERENCE PROJECTS



Calabash Luxury Boutique Hotel
- Grenada



Dreamland Hotel
- Georgia

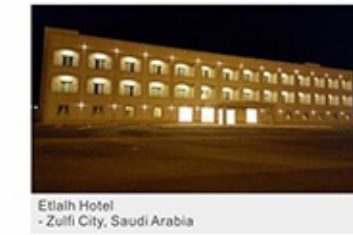

Etihad Hotel
- Zulfli City, Saudi Arabia



HOTEL CAVTAT
- Croatia



Grand Hotel Wyong
- Australia



HOTEL CONSUELO
- Philippines



Golden Tulip Hotel
- Port Harcourt, Nigeria



Hotel HILLVIEW Munnar
- Kerala, India



Hotel Ihusi 2 in Goma
- Democratic Republic of Congo



McNevin Maryborough Motel
- Australia



Le Cilaos Hotel
- Reunion



Vila Heritage Hotel
- Malaysia



Hotel Savanna
- Philippines




HOTEL PANORAMIQUE
- France



Mayfair Residence
- Manchester, UK



SOLVI HOTEL
- Spain



Baltimore Plaza Hotel
- Baltimore Md 21202, USA



PANORAMIQUE SAINT-CHARLES
- France



GATELL HOTEL
- Spain



Парк-отель «Лазурный Берег»
- Russia



Residency Hotels
- Nigeria



Regent 88
- London, UK



The Sunbridge Halls
- UK



Century Hotel
- Doha, Qatar